

GS30


Features




1. With the double ported balance valve system, the discharge capacity of the trap is extra large.
2. The opening of trap can be adjusted automatically and condensate can be discharged according to the change of flow rate.
3. Built-in bi-metal automatic air vent can prevent air locking effectively and start quickly.

Application: As the steam trap with extra large discharge capacity, the GS30 is suitable for large steam equipment in industries of petroleum, chemistry, metallurgy, electric power, food and paper-making, etc..

Note: Protection rod of the float must be removed after installation.

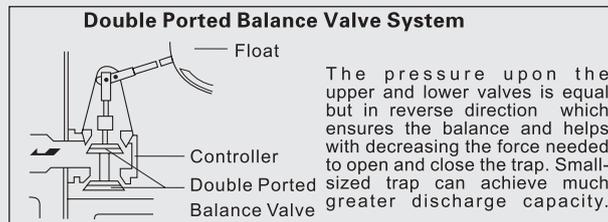


Capacity Chart

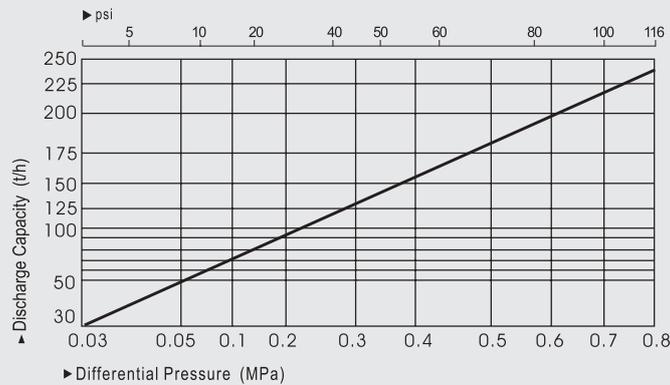

The Min differential pressure will be adjusted a little to meet your technical requests!

Dimensions

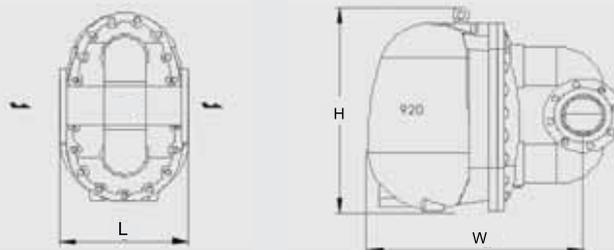

Model	Size (inch)	Connections (Standard)	Op.Press.Range (MPa)	PN	PMA/TMA MPa/°C	Body Material	Dimensions (mm)			Weight (Kg)
							L	W	H	
GS30	6	Flanged (GB,ANSI,JIS)	0.03-0.8	PN25	1.0/427	WCB	480	810	850	360
	8									370

The port size 4" JIS 10K Flange can be designed as your technical requirements!