

Thermodynamic Steam Traps

SP3


■ Features




1. Air insulation extends service life.
2. Small in size and light in weight, easy for maintenance.

Application: Suitable for low pressure steam main pipe, steam tracer and small heating equipment in industries of petroleum, chemistry, rubber, paper-making, dyeing, manufacturing, and metallurgy, etc..


■ Capacity Chart

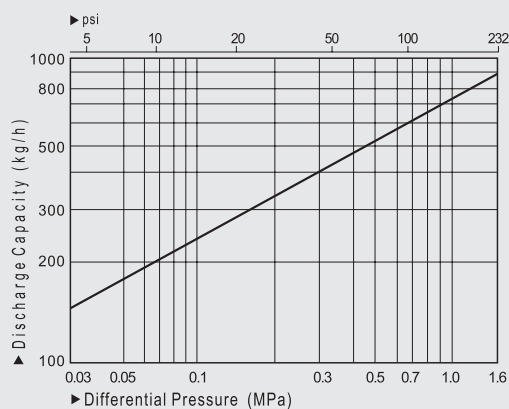

■ Dimensions



SP3 (W)

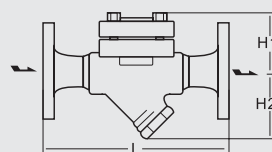

SP3F

Model	Size (inch)	Connections (Standard)	Op.Press.Range (MPa)	PN	PMA/TMA MPa/°C	Body Material	Dimensions(mm)			Weight (Kg)		
							L	H1	H2			
SP3	1/2-3/4	Screwed (Rc,NPT)	0.03-1.6	PN 25	1.76/350	A105	90	62	68	2.8		
	1						110	66				
SP3W	1/2-3/4	Socket Welded (GB,ANSI,JIS)					90	62	68	2.8		
	1										110	66
SP3F	1/2-3/4	Flanged (GB,ANSI,JIS)					150	66	73	3.8		
	1										160	4.5
	1.1/4-2										230	6.3